

Datasheet Gas upgrading

Amine scrubbing



Amine scrubbing

Future-proof resource economy

A comprehensive, reliable supply of renewable energy and the ability to produce regenerative fuels such as bio-LNG and bio-CNG are key to decarbonization and energy transition efforts. Whether it's combined with a Kompogas™ plant to create a complete solution or deployed on a standalone basis, biomethane gas upgrading technology completes the range of Kanadevia Inova products enabling energy to be produced from any sort of waste or biomass – in this case employing an upgrading process to convert raw biogases into high-purity biomethane that can be used as a versatile energy source.

Advantages of biomethane technology


Raw gases from a wide range of different sources are suitable for upgrading: the digestion of municipal green waste, organic household waste or agricultural biomass. Sewage and landfill gas can also be converted into energy. This extends a plant's value chain and promotes the circular economy. Depending on the composition, raw gas pretreatment may be required. Then comes the

main process, where the carbon dioxide in the stream of gas is separated from the methane, with the resulting biomethane conditioned to the desired quality parameters.

Technical description

Amine scrubbing is a chemical process that is suitable for sites with a source of heat and high product gas requirements, and where the gas has to be delivered from the gas upgrading unit to the feed-in station at low pressure. It is also no problem to increase the pressure for sites outside Germany where higher pressure is required. After pretreatment, the raw gas flows through a packed column, where an amine solution that absorbs carbon dioxide trickles from top to bottom in the opposite direction to the gas. Then biomethane of up to 99.9% purity is removed at the top of the tower. The used amine scrubbing solution is regenerated for reuse in the process. This process is highly robust when it comes to dealing with impurities in the stream of biogas, and like membrane technology stands out in terms of high plant availability.

Scheme of principal setup

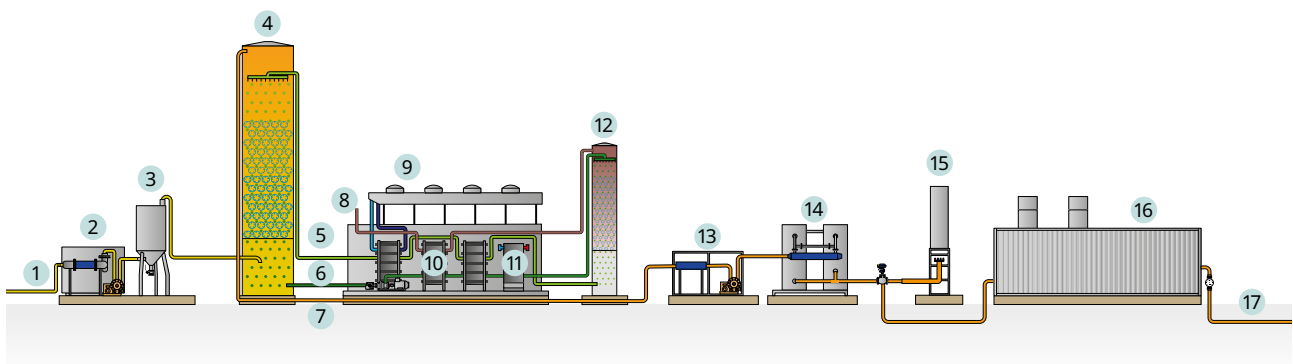

Vorbehandlung

- 1 Rohgasleitung
- 2 Trocknung und Vorverdichtung
- 3 Entschwefelung

Rohgasaufbereitung

- 4 Waschkolonne
- 5 Regenerierte Aminwaschlösung
- 6 Beladene Aminwaschlösung
- 7 Methanleitung
- 8 CO₂ zur weiteren Nutzung
- 9 Freikühler

- 10 Wärmetauscher
- 11 Zufuhr der Prozesswärme
- 12 CO₂-Abscheidung
- 13 Trocknung und Verdichtung
- 14 Feinsttrocknung

Energetische Nutzung

- 15 Sicherheitsfackel
- 16 Gaseinspeisung
- 17 Gasversorgungsnetz

Gas upgrading: A-Series

		Model S			Model M			Model L
Upgrading capacity	kg CO ₂ /h	500	700	1,000	1,400	2,000	2,500	≤ 5,600
Technical data								
Container		1 x 45'			2 x 40'			Skids
Length of container	mm	13,700			12,000			12,000
Width of container	mm	3,000			6,000			6,000
Height of container excl. superstructure	mm	3,000						
Area of outdoor installation	m ²	75	75	130	130	156	156	300
Height of scrubbing column	mm	12,000						16,000
Weight of container 1	t	20			31			40
Weight of container 2	t				19.6			25
Connection RBG	DN	150	200	250	250	400	400	400
Connection BM	DN	100	100	100	150	150	150	250

Performance data								
Voltage	V	400						
Frequency	Hz	50						
Scrubbing liquid		MDEA/water						
Content scrubbing liquid	m ³	4	5	6	8	10	10	28
Processable RBG		Biogas/waste gas/sewage gas						
BM quality	Vol.-% CH ₄	up to 99						
Outlet pressure BM ¹⁾	mbarg	50-150						
Dew point BM ²⁾	°C	≤ 4	≤ 4	≤ 4	≤ 4	≤ 4	≤ 4	≤ 4
Power demand ³⁾	kWh/Nm ³ RBG	0.06	0.06	0.06	0.06	0.06	0.06	0.06
Heat demand at 47 vol.-% CO ₂ in RBG	kWh/Nm ³ RBG	0.65	0.65	0.65	0.65	0.65	0.65	0.65
Max. inlet temperature of cooling water	°C	30	30	30	30	30	30	30
Max. outlet temperature of cooling water	°C	40	40	40	40	40	40	40
Theoretically removable cooling water heat	kW	325	455	650	910	1,300	1,300	3,640
Heat extraction primary < 90 °C	kW	60	84	120	168	240	300	670
Heat extraction secondary 45/55 °C	kW	160	224	320	448	640	800	1,790
Water demand	m ³	none						
Condensate ⁴⁾	kg/h	39	55	78	110	156	156	174
Resulting waste water	m ³	none						
Designed for temperatures	°C	-20 to +35						

Emissions		
Methane loss	%	≤ 0.1
Sound pressure level at 10 m distance ⁵⁾	dB(A)	75

¹⁾optional increase possible, ²⁾@norm conditions, ³⁾tolerance of ± 10% according to DIN 1945/VDI 2045/ISO 5389. Electrical consumption depends on operating parameters and environmental conditions, ⁴⁾resulting condensate in g/Nm³ raw biogas per hour, ⁵⁾optional reduction possible
Abbreviations: RBG = raw biogas, BG = biogas, BM = biomethane

Kanadevia Inova AG

Hardturmstrasse 127
8005 Zurich
Switzerland
P +41 44 277 11 11
F +41 44 277 13 13
info@kanadevia-inova.com
www.kanadevia-inova.com